


Installation Instructions

B51 Rotating D-Ring & B52 Rotating D-Ring w/ 55° Angle


1. Inspect both sides of the mounting surface for assembly clearance.
2. Mark and cut a hole in the mounting surface approximately 2-7/8" in diameter.
3. Deburr hole for surface rotation of D-Ring
4. Install disk from rear.
5. Place the D-Ring and weld-on bracket into the two slots of the disk and rotate to confirm smooth operation and clearance.
6. Weld the bracket and the disk together.

CAUTION

THE LOAD CAPACITY WILL VARY DEPENDING ON THE MOUNTING CONDITIONS, MOUNTING PLATE THICKNESS, AND WELDS.

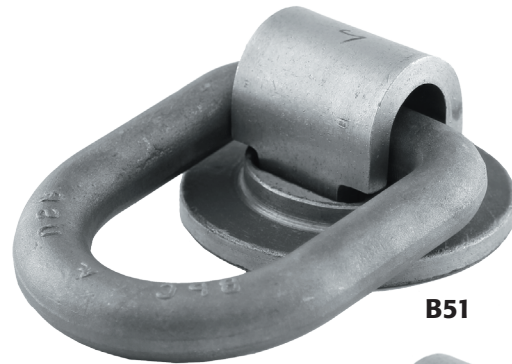

B51

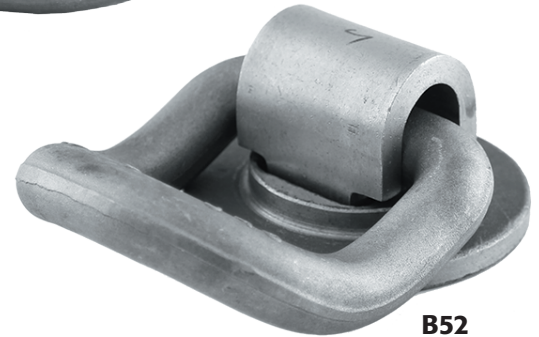

B52

WARRANTY

Buyers Products Co. warrants all truck/trailer hardware manufactured or distributed by it, to be free from defects in material and workmanship for a period of one year from date of shipment. Parts must be properly installed and used under normal conditions. Any product which has been altered, including modification, misuse, accident or lack of maintenance will not be considered under warranty. Normal wear is excluded. The sole responsibility of Buyers Products Co. under this warranty is limited to repairing or replacing any part or parts which are returned, prepaid, and are found to be defective by Buyers Products Co. Authorization from Buyers Products Co. must be obtained before returning any part. No charges for transportation or labor performed on Buyers' products will be allowed under this warranty.